


9 Channel ACTIVE UTP RECEIVER DISTRIBUTION AMPLIFIER

ITEM NO.: 15-WD09RA

FCC CE C-TICK ROHS

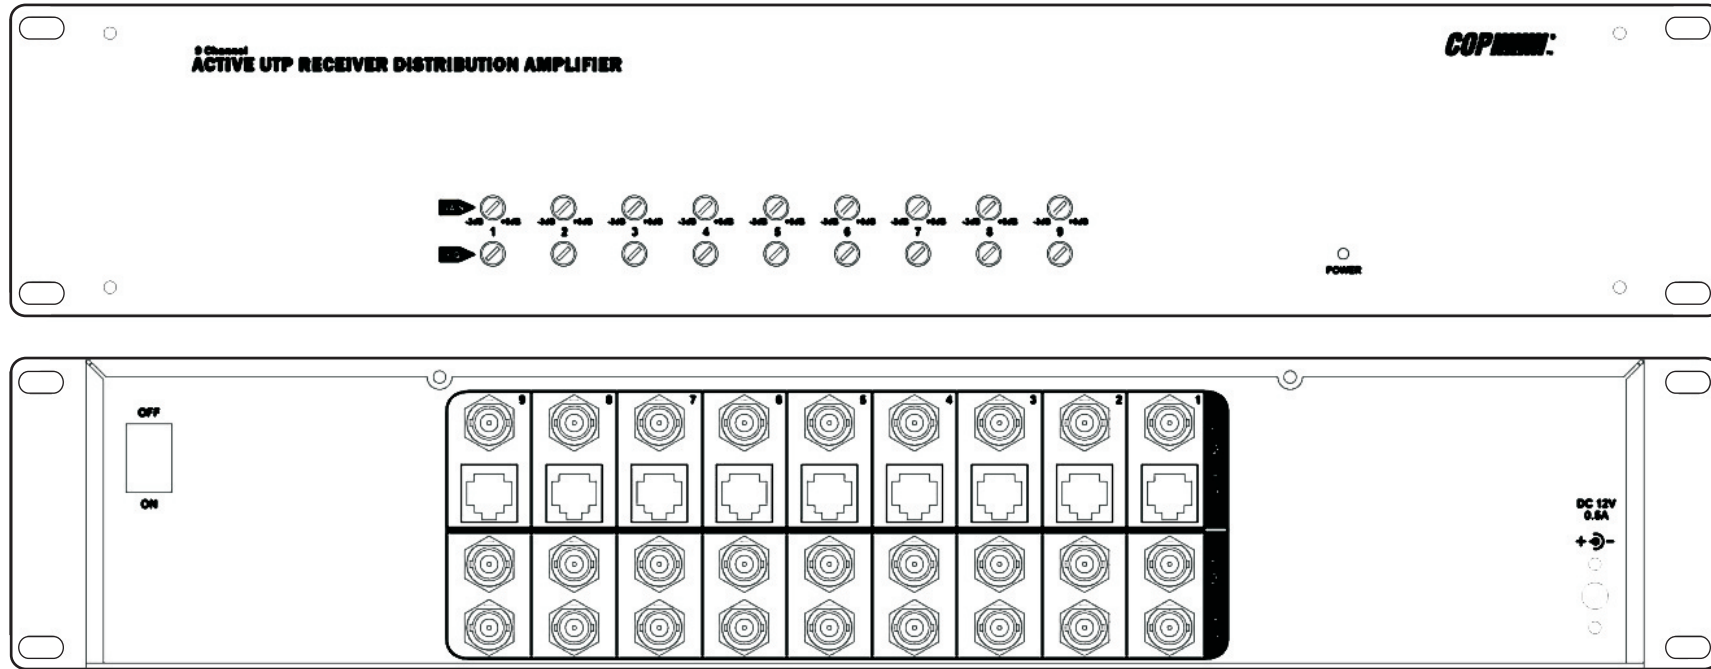

Features:

Design for 9CH UTP/BNC Video active receiver. Each channel build-in Video signal "EQ" and "gain". Build-in 2X BNC 75 ohm Video Distribution "Amp". Surge protection circuit and noise reduction design.

Installation View:

Power on-off the unit by back-panel "Power switch". Connect the UTP or BNC Video input from Camera. Adjust Video input "EQ" or "Gain" if input Video. Sources signal are not standard. (weak or over-drive)

Specifications:

| | |
|--------------------|---------------------------------|
| ITEM NO. | 15-WD09RA |
| Input Voltage | DC 12V 0.5A |
| Input Resistance | 75 Ohm |
| Input Voltage | 0.5 -1.0 V pp Composite Signals |
| Output Resistance | 75 Ohm |
| Gain Control Range | -3 dB -6dB |
| Dimensions | w 483 x h88 x d 170 mm |
| | |

